EuropeanHome

Installation, Operation and Maintenance Manual

DV 52 ST

See-through
Gas
Fireplace

Check local codes and read all instructions prior to installation.

⚠ Warning:

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to this manual. For assistance or additional information consult a qualified installer, service agency or the gas supplier.

Safety Notice:

Glass doors on gas fireplaces are extremely hot while the fireplace is on and remain hot even after the fireplace has been turned off. Safety screens are available and can reduce the risks of severe burns. Please keep children away from the fireplace at all times.

For Your Safety:

Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

⚠ Warning:

What to do if you smell gas

- ***Do not try to light any appliance.***
- ***Do not touch any electrical switch; do not use any phone in your building.***
- ***Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.***
- ***If you cannot reach your gas supplier, call the fire department.***

- *Installer: Leave this manual with the appliance.*
- *Consumer: Leave this manual for future reference.*

⚠ Warning:

Read this manual before installing, operating or troubleshooting this appliance.
Please retain this owner's manual for future reference.

Congratulations

Congratulations on selecting a European Home gas fireplace, an elegant and well-designed gas fireplace built with you in mind. The European Home gas fireplace you have selected is designed to provide the utmost in safety, reliability, and engineering standards.

As the owner of this new fireplace, you'll want to read and carefully follow all the instructions contained in this Installation, Operations and Maintenance manual. Pay special attention to all cautions, warnings, and notices.

This owner's manual should be retained for future reference. We suggest that you keep it with all your other important documents and product manuals.

The information contained in this owner's manual, unless noted otherwise, applies to all models, and gas control systems.

Your new European Home gas fireplace will give you years of durable, reliable use. Welcome to the European Home family of gas fireplace products.

⚠ *Safety Alert Key:*

- ***DANGER!*** Indicates a hazardous situation which, if not avoided will result in death or serious injury.
- ***WARNING!*** Indicates a hazardous situation which, if not avoided could result in death or serious injury.
- ***CAUTION!*** Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
- ***NOTICE:*** Used to address practices not related to personal injury.
- ***Important:*** *Used to address practices not related to personal injury.*

Table Of Contents

Congratulations

Safety Alert Key

Introduction 3

Installation

Installing and Framing the Fireplace 4

Installing the Gas Line 5

Vent Installation 5

Installation Requirements 5

Installing the Remote Switch 5

Vent Terminations 6

Installing the Nailing Flange 6

Top Vent Runs ..... 7 - 8

Finishing Around the Fireplace

Fireplace Facing 9

Mantels and Surrounds 9

Power Venting 10

Wiring 10

Wiring for the Gas Control/Pilot 10

Removing and Installing the Door 11

Operation ..... 12 - 15

Maintenance ..... 15 - 17

Troubleshooting ..... 16 - 17

Spare Parts 17

Warranty 18

Appendix

A. Termination Locations 19

B State of Massachusetts/Amendment 20

Notes 21

Introduction

About this Fireplace:

The **DV 52 ST (**See-thru) are fireplaces with a linear-style burner. These fireplaces can be converted to either a Top Vent or Rear Vent application.

The **DV 52 ST** (See-thru) is rated for Natural Gas at 40,000 Max. BTU/H (11.73 kW) input and 34,000 Min. BTU/H (9.97 kW)

- **DV 52 ST;** Top Vent, Millivolt Pilot.
- **DV 52 ST E;** Top Vent, Electronic Ignition.

This manual covers installation, operation and maintenance. Lighting, operation and care of this fireplace can be easily performed by the homeowner. However, all installation and service work should be performed by a qualified or licensed installer, plumber, or gas fitter who is qualified or licensed by the state, province, region, or governing body in which the appliance is being installed.

This manual covers all models and unless otherwise specified, the designation **DV 52 ST** refers to all variations of the model above. Sections which are specific to a particular variation are marked with a ⬬ symbol, plus the appropriate model number.

Warranty and Installation Information:

The European Home warranty will be voided by, and European Home disclaims any responsibility for, the following actions:

- Modification of the fireplace and/or components including direct vent assembly or glass doors.
- Use of any component part not manufactured or approved by European Home in combination with this European Home fireplace system.
- Installation other than as instructed in this manual.

Consult your local Gas Inspection Branch on installation requirements for factory-built gas fireplaces. Installation and repairs should be done by a qualified contractor.

Installations in Canada must conform to the current **CAN/CGA B-149.1** and **.2** Gas Installation Code and local regulations. If the optional air-circulating fan kit is installed, it must be electrically grounded in accordance with **CSA C22.1** Canadian Electrical Code Part 1 and/or local codes.

Installations in the USA must conform to local codes, or in the absence of local codes to the National Fuel Gas Code, **ANSI Z223.1-1988**. If the optional air-circulating fan is installed, it must be grounded in accordance with local codes or, in the absence of local codes, with the National Electrical Code, **ANSI/NFPA 70-1987.** Within the **State of Massachusetts** this fireplace must comply with **NFPA-54 Chapter 10**.

⚠ CAUTION!

Due to its high operating temperatures, the appliance should be located out of traffic and away from furniture and draperies.

- Children and adults should be alerted to the hazards of the high surface temperature, which could cause burns or clothing ignition.
- Young children should be carefully supervised when they are in the same room as the appliance.
- Clothing or other flammable materials should not be placed on or near the appliance.

What is Combustible?

Materials that can catch fire and burn are considered combustible. Any material that is made of, or faced with, wood, wood pulp, paper, plastic or any other material that can catch fire and burn is considered combustible. Even though these materials may have been 'flame-proofed', made 'fire-resistant' or are 'fire-rated' they are considered combustible.

The combustibility of a material can be tested per "ASTM E136 Standard Test Method for Behavior of Materials in a Vertical Tube Furnace at 750 Degrees C". Note that 'fire-resistant' does NOT mean non-combustible.

Note: If a certain material has a core considered to be non-combustible (in accordance with ASTM E136) but is faced with a combustible material then the material is considered to be combustible.

When in doubt, ask for an ASTM E136 compliance statement.

What is Non-combustible?

A given material is said to be non-combustible when it cannot catch fire and burn. For example, materials made entirely, or in combinations, of, stone, brick, concrete, tile, steel, plaster or glass are considered non-combustible.

For the purposes of the installations described in this Manual, those materials that have passed the ASTM E136 tests are considered to be non-combustible.

As of this writing, the materials listed below are reported by their manufacturers to be non-combustible (in accordance with ASTM E136):

- James Hardie Building Products, Inc.:
  HardieBacker™ ¼" Cement Board
- U.S. Architectural Products, Inc.:
  Versaroc® Cement Bonded Particle Board
  Cem-Clad® Cement Panel

Installation

Installing The Fireplace Shell

The fireplace may be installed in any location that maintains proper clearances to air conditioning ducts, electrical wiring and plumbing. Safety, as well as efficiency of operation, must be considered when selecting the fireplace location. Try to select a location that does not interfere with room traffic, has adequate ventilation, and offers an accessible pathway for direct vent installation. Refer to **Page 4** - *Vent Installation* for more information.

The fireplace dimensions are shown below:

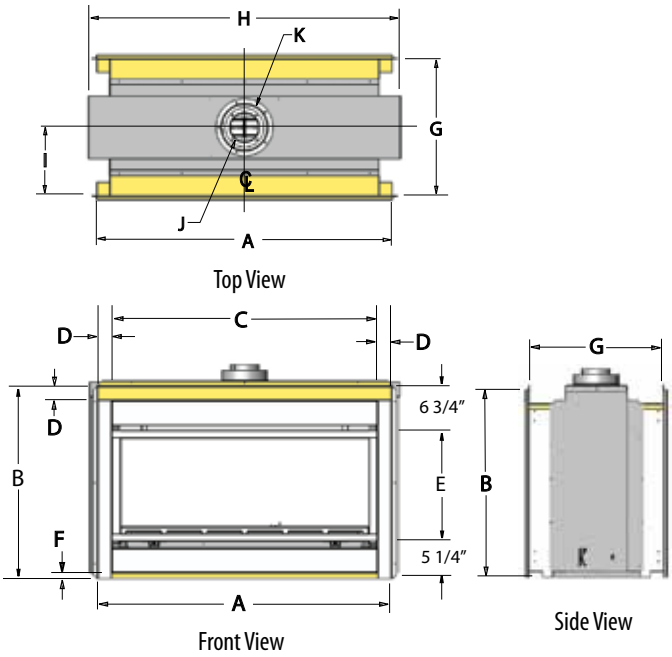

	A	B	C	D	E	F	G	H	I	J	K
DV 52 ST	52	33¼	47	2½	21⅛	1	24	58¼	12	5	8

Figure 1. *Fireplace dimensions in inches.*

Clearances

These clearances apply to all dimensions ***except the framed opening***, where the clearance to combustibles is ***0"***. The **DV 52 ST** clearance to unprotected combustible walls which are perpendicular to the fireplace opening, must not project beyond the shaded area shown in ***Figure 24***.

For protection against freezing temperatures, it is recommended that outer walls of the chase be insulated with a vapor barrier. This will reduce the possibility of a cold-air convection current on the fireplace.

Clearance to Combustibles	
Top (Top Vent)	30"
Sides	1"
Floor	0"
Mantel	4"

* Clearance from the top of the fireplace to a combustible ceiling within the fireplace enclosure.

** Refer to page 14.

Framing

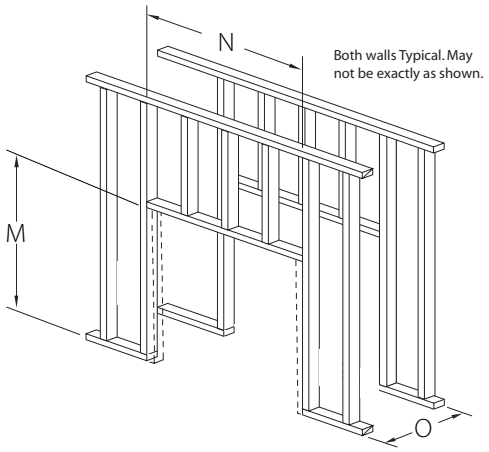

Framing Dimensions (inches)			
	M	N	O
DV 52 ST	39	60	23¾ or 24¾*

* When facing with the Overlay Method the depth is increased by 1".
See Planning Guide for more information.

Figure 2. *Framing dimensions.*

Frame the fireplace cavity according to ***Figure 2***.
Slide the fireplace into the cavity. Tack four studs (vertical) in place as shown in ***Figure 2a***. Secure the fireplace in position by nailing into these cleats. (*Minimum 2" clearance must still be maintained around the vent pipes.*)

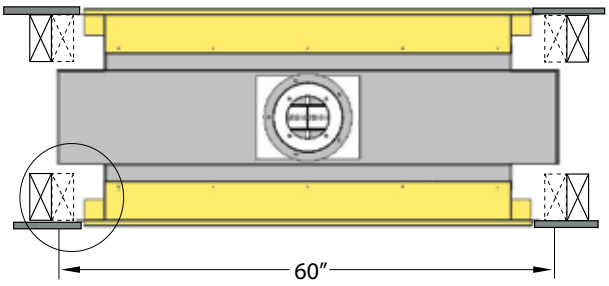

Figure 2a. *Securing the fireplace to the framing.*

WARNING!

When this appliance is installed directly on carpeting, tile or any combustible material other than wood flooring, it must be installed on a metal or wood panel extending the full width and depth of the appliance.

Installation

Installing The Gas Line

The gas line must be installed before finishing the **DV 52 ST** Fireplace. **Natural Gas** requires a minimum inlet gas supply pressure of 5.5" w.c. and a manifold pressure of 3.5" w.c. **Propane Gas** requires a minimum inlet gas supply pressure of 11" w.c. and a manifold pressure of 10" w.c. Provision must also be made for a ⅛" N.P.T. plugged tapping and be accessible for test gauge connection immediately upstream of the gas supply controls to the appliance. The fireplace gas connection and the main operating gas valve is located behind the removable trim at the bottom of the unit and need only be attached to the gas line with an approved fitting, as required by the **applicable installation codes**.

To access the fireplace gas connection the main burner must be removed as shown below in *Figure 5a*.

• Only use gas shut-off valves approved for use by the state, province, region, or governing body, in which the appliance is being installed, or as required by the applicable installation codes.

• Flexible gas connectors must not exceed 3 feet in length, unless it is allowable within applicable installation codes.

The appliance and its individual shut-off valve must be disconnected from the gas

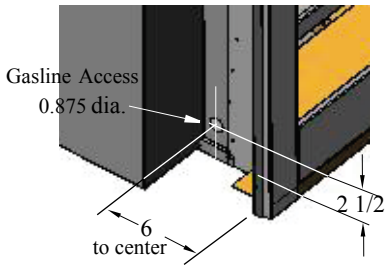

Figure 5a. *Gas line access.*

supply piping system during any pressure testing of that system at test pressures in excess of ½ psig (3.5 kPa).

The appliance must be isolated from the gas supply piping system by closing its individual manual shut-off valve during any pressure testing of the gas supply piping system at test pressures equal to or less than ½ psig (3.5 kPa).

Note: After gas line is connected, **each *appliance connection*, *valve and valve train*** must be checked while under normal operating pressure with either a liquid solution, or leak detection device, to locate any source of leak. Tighten any areas where bubbling appears or leak is detected until bubbling stops completely or leak is no longer detected. **DO NOT use a flame of any kind to test for leaks.**

Vent Installation

This section covers the installation of direct venting and terminations.

Installation Requirements

- DV 52 ST fireplaces are certified for use with European Home 5"/8" venting components.
- Minimum clearance to combustible construction around the vent pipe is 1" on all sides, except on horizontal venting where the top of the pipe must have a clearance of at least 2".
- Use only certified European Home vent components. (Use of other parts will void the European Home warranty, and may impede the operation of the fireplace.)
- All joints must be secured with a minimum of two screws per joint
- Vent terminations must not be recessed in walls or siding
- Horizontal runs must be supported by a minimum of two supports per horizontal run. A minimum of one screw on each side of support is also required
- Flex vent sections may be stretched up to 50% of their total length (e.g. a 24" section may be stretched to 36")
- Flex vent sections over 6 feet must fall within the limits set by the venting graph and must have a minimum vertical rise of 3 inches per foot of flex.
- Solid vent sections may be cut less than half way from the female end
- Venting components can be used in any combination of solid/rigid pipe or flex pipe and in any orientation - male connectors can face in any direction

Cautions:

- Vent terminations can be very hot. If the termination is less than 7 feet above a public walkway, it should be fitted with a certified European Home Heat Guard. (Part no. PTKOG).
- Do not obstruct, or attempt to conceal, the vent termination. These actions will affect the operation of the fireplace, and may be hazardous.
- In heavy snow areas, take extra care to prevent snow buildup from obstructing the vent termination.
- Use European Home VSS Vinyl Shield when using on applications with vinyl siding to guard against possible damage.

Installing The Remote Switch

The **DV 52 ST** gas valve, located behind the lower horizontal panel, may be connected to a wall switch. The valve generates its own power on **a millivolt circuit. Use only low voltage wire, and DO NOT** connect any external power to it.

Note: The switch location must not exceed 30' from the fireplace.

Installation

Installing Terminations with Built-In Frames

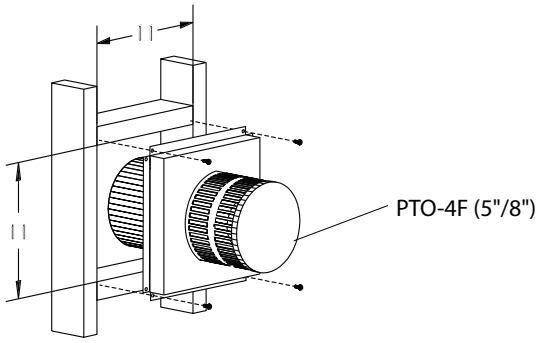

Figure 5a. *Installing a PTO termination.*

1. Frame the termination opening to 11" x 11".
2. Fasten the termination to the studs using a minimum of 4 screws.

Installing Terminations with MSR Frames

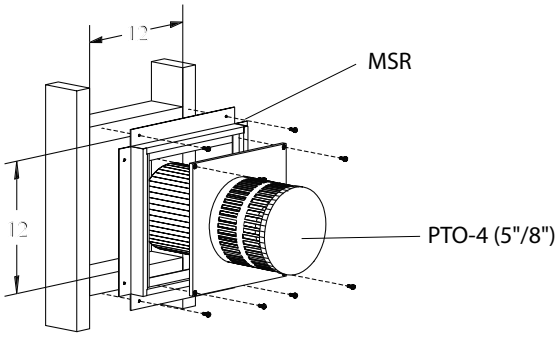

Figure 5b. *Installing a PTO termination with the MSR frame.*

1. Frame the termination opening to 12" x 12".
2. Fasten the termination to the studs using a minimum of 4 screws.

Installing Terminations with MOSR Frames

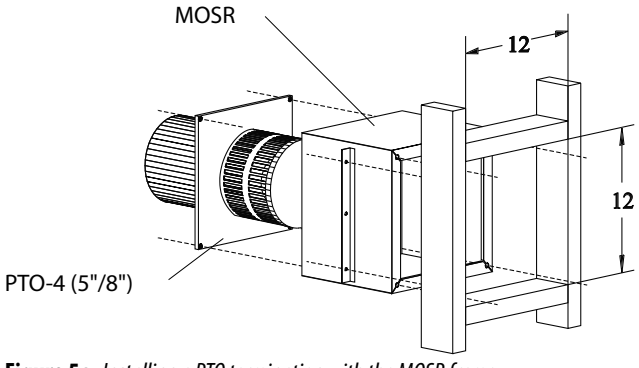

Figure 5c. *Installing a PTO termination with the MOSR frame.*

1. Frame the termination opening to 12" x 12".
2. Fasten the MOSR frame to the interior side of the studs using a minimum of 4 screws.
3. Insert the termination into the MOSR frame as shown here and attach by screwing through the four pilot holes in the termination.

Installing Heat Guards over Terminations

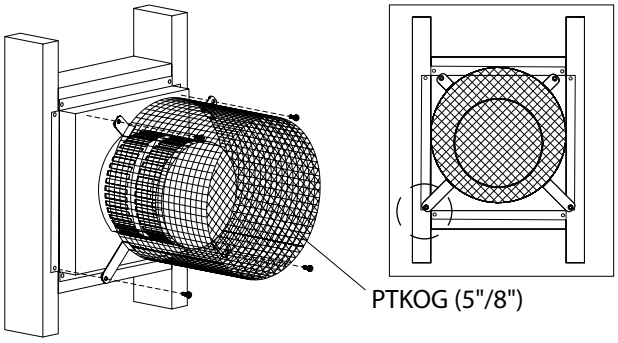

Figure 5d. *Installing a PTO termination heat guard.*

1. Ensure that the two ***long*** mounting brackets are facing the bottom of the termination. (See inset). This will provide more heat protection at the top of the termination, where temperatures are highest.
2. Attach to the faceplate of the termination using four sheet metal screws.
3. If installing the termination over vinyl siding, use the VSS Vinyl Shield.



Figure 6. *Installing the VSS Vinyl Shield.*

Installation

Top Vent Venting Runs

DV 52 ST

DV 52 ST

Example A: (Unacceptable Installation)

If the vertical dimension from the hearth is 84" and the horizontal run to the wall flange of the vent termination is 36", the installation is **NOT** acceptable.

Example B: (Acceptable Installation)

If the vertical dimension from the hearth is 108" and the horizontal run to the wall flange of the vent termination is 120", the installation is acceptable.

Example C: (Unacceptable Installation)

If the vertical dimension from the floor of the fireplace is 72" and the horizontal run to the wall flange of the vent termination is 84", the installation is **NOT** acceptable.

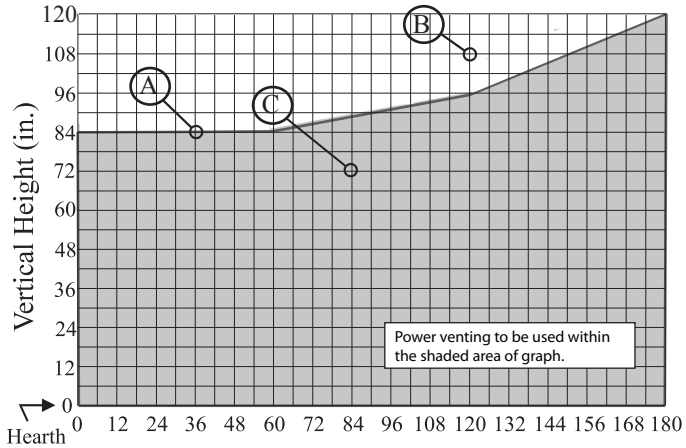

Figure 9c. ***DV 52 ST*** *Top Vent Venting Graph*

NOTES: All dimension lengths for vertical or horizontal runs are measured from centre of the vent pipe.

Venting runs *must* fall within the limits set by the venting graph (see ***Figure 9c***).

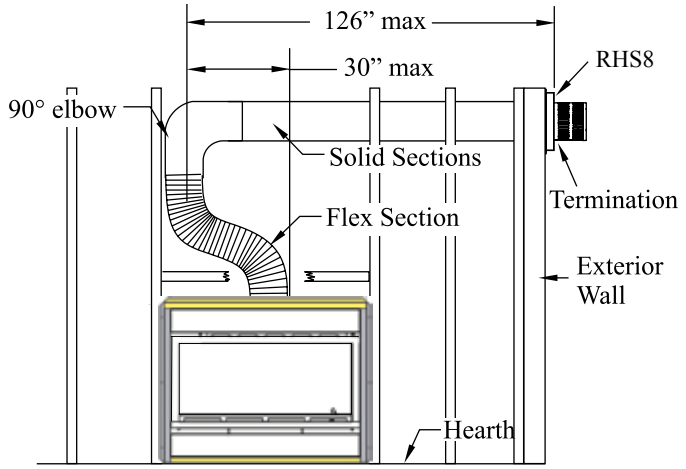

Figure 13. *Retracted Installation using a combination of solid and flex venting. Use the vent graph to determine your allowable run, then select appropriate components.*

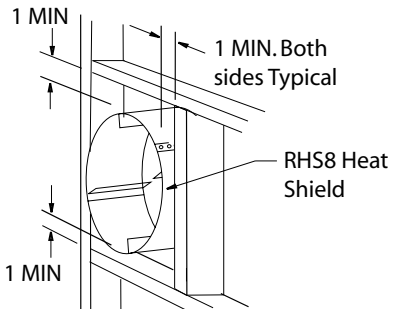

Figure 11. *RHS8 Installation. Install by sliding over vent pipe where it passes through the combustible construction.*

B. Vertical (Through-The-Roof) Installations

- Vertical rise >12' can be reduced (on applicable models).
- Vertical terminations must be installed:
  - minimum 2' (two feet) above the highest point where vent passes through the roof.
  - minimum 6' (six feet) from a mechanical air inlet
  - minimum 18" (1½ feet) from a parapet wall.
- Maximum vent height is 32 feet above fireplace. Note that flame characteristics will change if the maximum vent height is used.
- Minimum clearances 2" from vent to all combustible materials must be maintained.
- A maximum of two offsets (each offset has two 90° bends) may be made and shall not exceed total length of 25% of the vertical vent height, when measured center to center of piping.

Example: Typical vent installation.
20' vertical vent
2 - 2' offsets required
25% of 20' = 5' max. offset allowed
This venting configuration meets requirements.

	5" / 8" Venting
A - Termination	PVTK-1
B - Flex Sections	PFL-1 (12" Section) PFL-2 (24" Section) PFL-3 (36" Section) PFL-4 (48" Section)
C - Rigid Sections	PEXT-1 (12" m/f Section) PEXT-2 (24" m/f Section) PEXT-3 (36" m/f Section) PEXT-4 (48" m/f Section)
D - Support Ring and Plate	PSPXT-8
E - Firestop	PS-8
F - Roof Flashing	PRF-7 (1/12 - 7/12 pt.) PRF-7 (7/12 - 12/12 pt.)

Installation

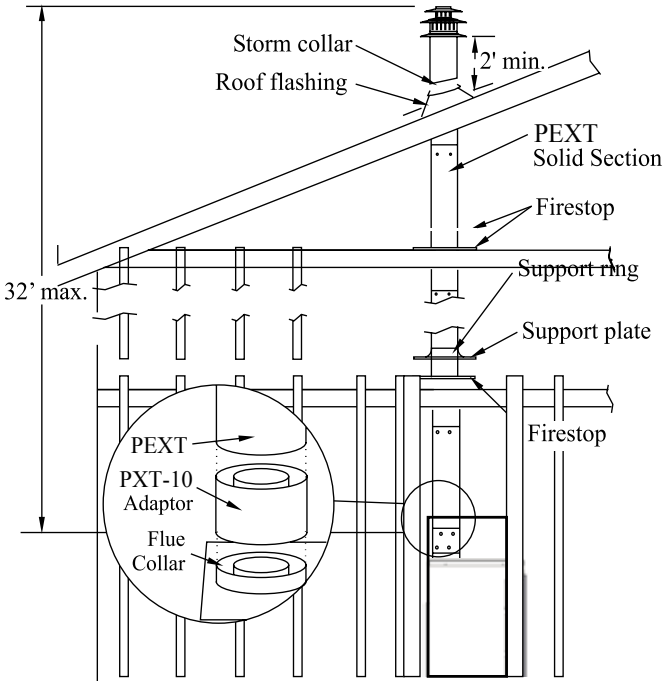

* For venting minimum 1" clearance to all vertical combustibles, minimum 2" to all horizontal combustibles.

Figure 15. *Straight, vertical venting* showing required PXT-10 adaptor (supplied with the PVTK-1 termination).

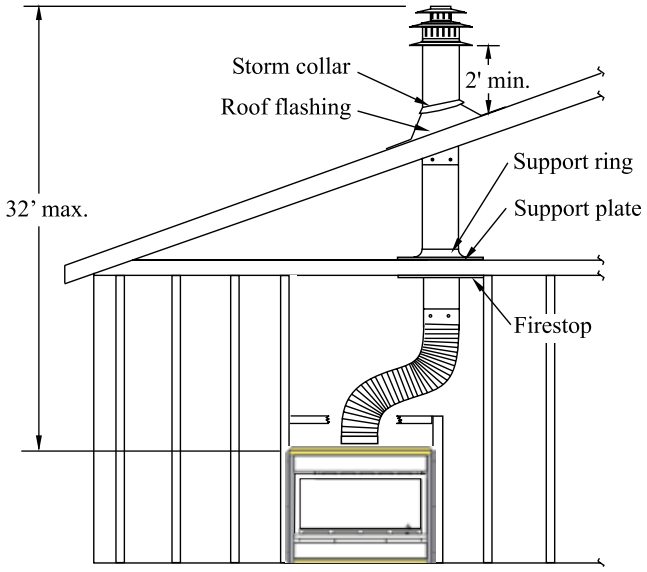

Figure 16. *Vertical venting with 1 offset (1 offset= two* 90° bends).

NOTES:
- All dimension lengths for vertical or horizontal runs are measured from centre of the vent pipe.
- Venting runs *must* fall within the limits set by the venting graph (see ***Figure 7b***).

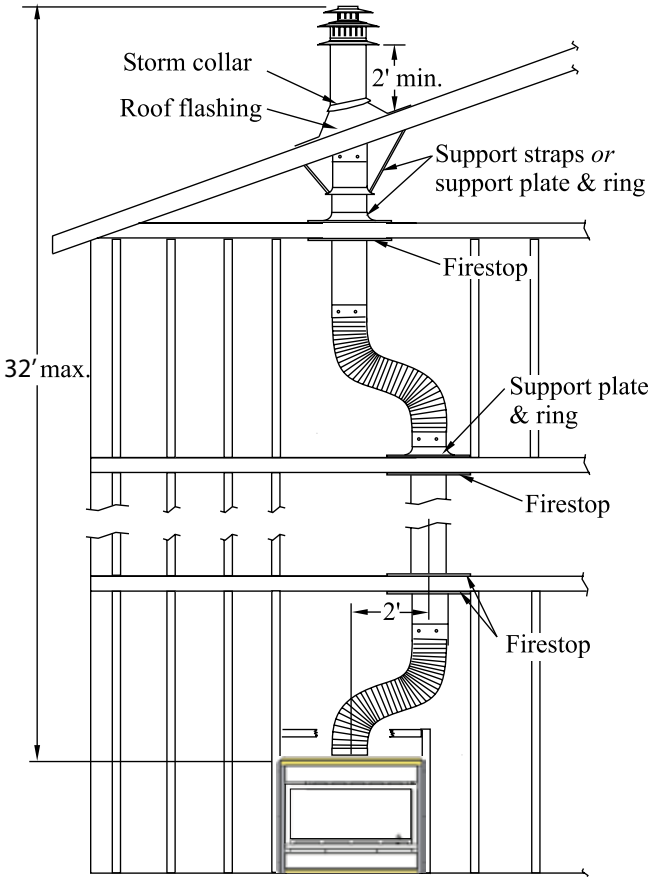

Figure 17. *Vertical venting with 2 offsets (1 offset= two* 90° bends).

Reduced Vertical Installation

(Available on Linear Power Vent models ONLY)

It is possible to reduce vertical vent runs from 5"/8" venting to 4"/7" venting. Reduced vertical venting may only be used when the linear (in-line) power vent is required. This is commonly due to longer than normal vent runs or unusually long horizontal vent runs.

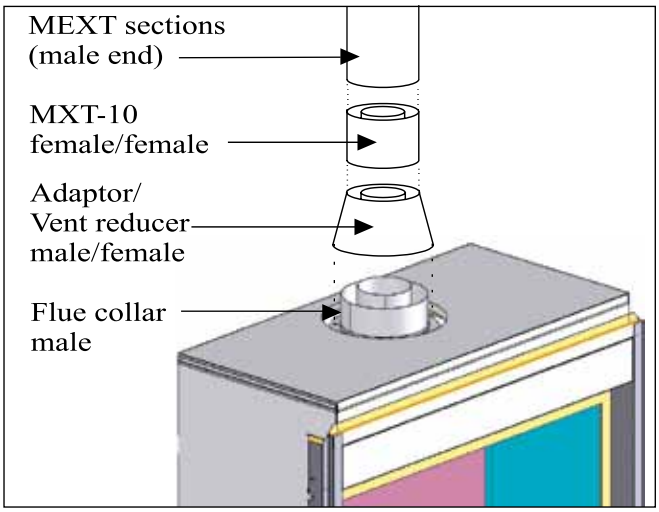

Figure 18. *Reducing Vertical Vent from 5/8" to 4/7".*

Installation

Installing the Horizontal and Vertical Exterior Power Vent

A power vent is required where the termination is located too far away from the gas fireplace and/or if the vent run is beyond the scope of this document, or the specifications recommend vent augmentation. These power vents are required for superior venting, safe operation and years of trouble free operation.

The available European Home Power Vent models are:

LDVPV47 - Linear, Interior In-line Power Vent.

EDVPV47 - External Power Vent.

Finishing Around the Fireplace

Combustible mantels and mouldings may be safely installed over the top and on the front of the fireplace provided that they do not project beyond shaded area shown in ***Figure 24***. Side wall clearances are 3". Combustible surrounds may be installed with 3" clearance to the side of the fireplace as shown in ***Figure 25***.

When selecting the finish material for your fireplace, it is important to remember the following:

If the surround of the fireplace is to be painted to match the room decor, heat-resistant paint must be provided . Also, decorative facing must not extend past the fireplace opening at all because it will interfere with the access to retainers for removal of glass door and access to the lower compartment.

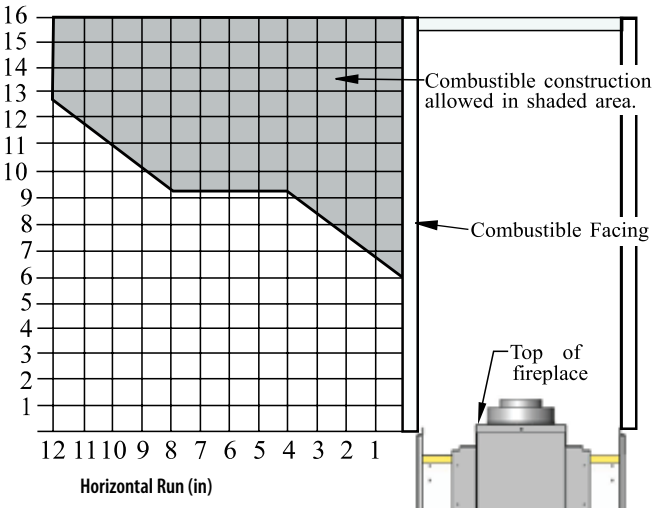

Figure 24. *Combustible mantles and facings.*

Mantels and Surrounds

NOTE: National Canadian Gas Association mantel test requirements are for fire hazard prevention to combustible materials.

New technology, to meet consumer and government demands for the wise use of energy, has prompted us to manufacture many models of fireplaces which are hot, fuel and energy efficient.

Please be aware; temperatures over the mantel will rise above normal room temperature and walls above fireplace may be hot to touch.

Warning:

When covering the upper metal portion of the fireplace with a non-combustible material Please Note: The decorative facing materials may be subject to temperatures in excess of 250° F. This should be considered when selecting facing materials.

We recommend careful consideration be given to the effects of elevated mantel temperatures which may be in excess of product design, for example: candles, plastic or pictures. This can cause melting, deformation, discoloration or premature failure of T.V. and radio components.

Painting:

Special care is recommended by the Master Painters and Decorators Association, when painting the fireplace surrounds, to select and apply a quality alkyd sealer prior to the applying of latex paints. This is to prevent leaching of water from evaporation and causing a brownish staining effect to paint over coats.

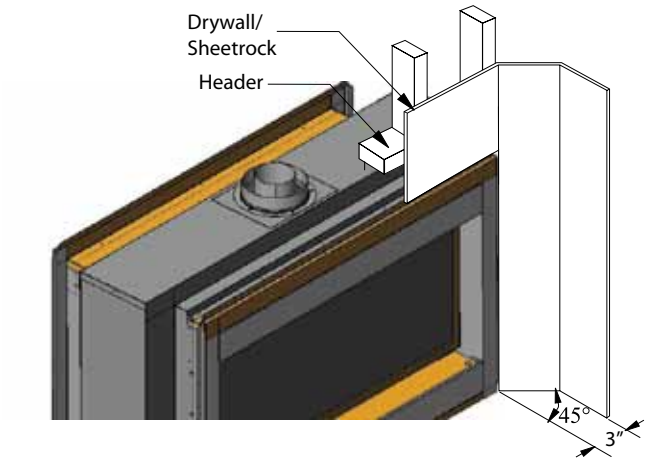

Figure 25. *Combustible surrounds, (Both Sides Typical).*

Installation

Wiring

Gas Control and Pilot Wiring

DV 52 ST

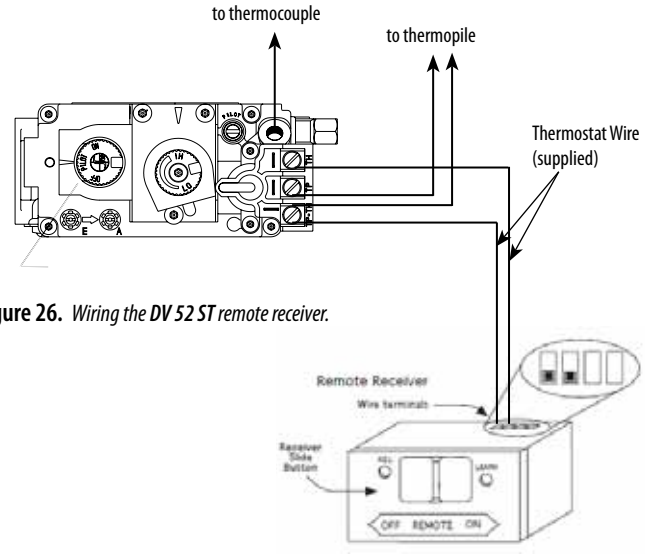

Figure 26. *Wiring the **DV 52 ST** remote receiver.*

DV 52 ST

Removing and Installing the Doors

The doors are removed in a few simple steps. Follow the steps below to remove the horizontal access panel, unlatch the door buckles and remove the door. Replace in reverse order.

Step 1: Remove the Horizontal Access Panel

Remove the horizontal cover by placing fingers in both finger holes, then pushing away from you and lifting out. Place it aside during maintenance or cleaning.
Install in reverse order.

Figure 28. *Removing and Installing the Horizontal Access Panel*

Step 2: Locate the Door Buckles

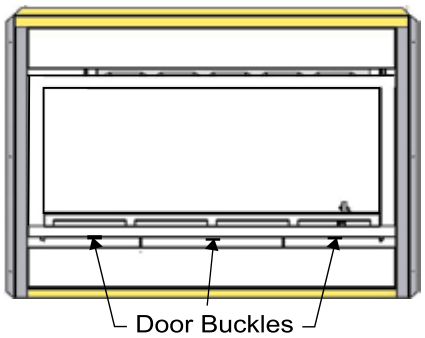

Figure 28a. *Locate the door buckles. (Both Sides Typical)*

Step 3: Release the Door Buckles

Figure 28b. *Door Buckle Tool*

Step 4:
Firmly grasp hand-hold end of door buckle tool and place the machined end in the slot under door frame, as shown.

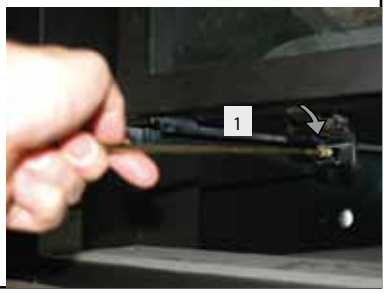

Figure 28c.

Installation

Step 5:
Ensure the tool is firmly in the lower end of the slot, as shown, then pull toward you.
Caution: hold the tool securely.

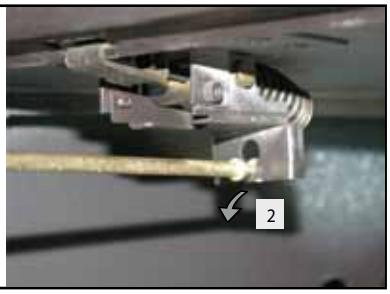

Figure 28d.

Step 6:
Pull hard if necessary to release the spring tension.
Caution: The latch springs back with force, hold the tool securely.

Figure 28e.

Step 7:
Remove the tool from the latch slot. Ensure the latches are hanging freely, the hook end is released from the bottom of the door. Repeat all four steps for the remaining latches.

Figure 28f.

Step 8:

Removing the Door

Grasp the door on either side, usually midway and lift upward, lift the door carefully up and away from the front of the fireplace. *See **Figure 28g**. Place the door aside in a safe place while maintenance and/or cleaning is being performed.*

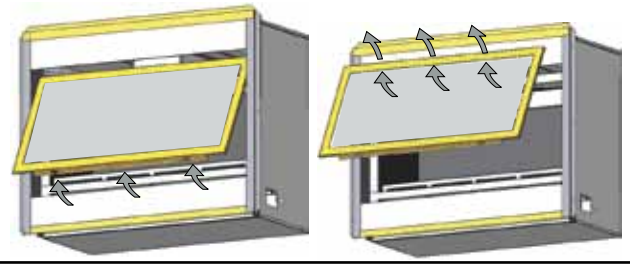

Figure 28g. *Removing and installing the glass doors. (Both Sides Typical)*

Installing the Door

To install the door, hook the top edge of the door frame into place. Lower the door into position and follow the previous steps shown in reverse order.

WARNING!

Do not attempt to clean glass when hot.

Do not clean glass with abrasive materials as any glass etching may cause premature glass failure.

Do not operate this fireplace without the glass door, or with a broken glass door.

Installing the Glass Beads and Optional Fire Media

DV 52 ST

The **DV 52 ST** fireplace is supplied with glass beads. Optional stone and driftwood fire media are available.

Remove the door and trim as shown previously. Follow these instructions to ensure all parts are removed or replaced as required. Once the trim and glass doors are removed place the glass beads **AROUND** the burner. The glass beads may be placed on the mesh pilot flame cover but ***neither the glass beads nor the fire media may be placed on the burner itself*** (see ***Figure 29***, below.)

Figure 29. *Installation with glass beads .*

DV 52 ST Operation - Model DV 52 ST

with Continuous Pilot

For Your Safety - READ BEFORE LIGHTING:

WARNING: **If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life.**

A. This appliance has a pilot which must be lighted by hand. When lighting the pilot, follow these instructions exactly.

B. **BEFORE LIGHTING** smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.

What To Do If You Smell Gas:

- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in your building.
- Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the Fire Department.

C. Use only your hand to push in or turn the gas control knob. Never use tools. If the knob will not push in or turn by hand, don't try to repair it, call a qualified service technician. Force or attempt to repair may result in a fire or explosion.

D. Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system, and any gas control which has been under water.

Lighting Instructions:

1. **STOP!** Read the safety information above on this label.
2. Lift out the lower horizontal access panel.
3. Push in gas control knob and turn clockwise to "OFF."
4. Wait five (5) minutes to clear out any gas. Smell for gas, including near the floor. If you then smell gas, **STOP!** Follow "B" in the safety information above on this label. If you don't smell gas, go to the next step.
5. Locate pilot burner, see illustration at right, and follow steps below.
6. Turn knob on gas control counter clockwise to "PILOT."
7. Push in gas control knob completely and hold. Light with Piezo Igniter button. Continue to hold the control knob in for about (1) minute after the pilot is lit. Release the knob and it will pop back up. Pilot should remain lit. If it goes out repeat steps 3 through 8.
   - If knob does not pop up when released. Stop and immediately call your service technician or gas supplier.
   - If the pilot will not stay lit after several tries, turn the gas control knob to "OFF" and call your service technician or gas supplier.
8. Push in gas control knob and turn counter-clockwise to "ON."
9. Replace the lower horizontal access panel.
10. Turn on remote switch to ignite fire.

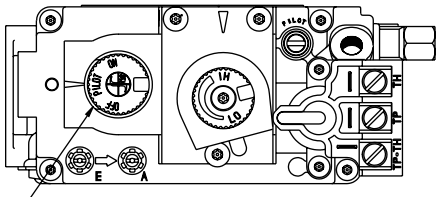

Gas Control Knob
(Shown in "Pilot" postion.)



NOTE: Gas control knob cannot be turned from "PILOT" to "OFF" unless knob is pushed in slightly. Do not force.

To Turn Off Gas To Appliance:

1. Turn off remote switch.
2. Lift out the lower horizontal access panel.
3. Push in gas control knob slightly and turn clockwise to "Off". Do not force.
4. Replace the lower horizontal access panel.

DV 52 ST E

Operation - Model DV 52 ST E

with Proflame SIT Electronic Ignition

For Your Safety - READ BEFORE LIGHTING:

WARNING: **If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life.**

A. This appliance is equipped with an ignition system that lights the pilot burner automatically. Do not attempt to light the pilot by hand.

B. BEFORE LIGHTING smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.

What To Do If You Smell Gas:

- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in your building.
- Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the Fire Department.

C. Use only your hand to push in or turn the gas control knob. Never use tools. If the knob will not push in or turn by hand, don't try to repair it, call a qualified service technician. Force or attempt to repair may result in a fire or explosion.

D. Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system, and any gas control which has been under water.

Lighting Instructions:

1. STOP! Read the safety information above on this label.
2. Remove the lower horizontal access panel.
3. Turn Incoming gas valve to the ON" position.
4. Wait 5 minutes to clear out any gas. If you smell gas, STOP! Follow "B" in the safety information above on this label. If you don't smell gas, go to the next step.
5. Turn wall switch "ON".
6. If the fireplace does not light, the system will cycle through two trials, (one minute audible clicking, thirty seconds of silence, and then another one minute of audible clicking). If the system locks out due to inadequate gas flow, refer to "Troubleshooting Section".
7. After completion of the information in the Troubleshooting section, Repeat step 5.
8. If the system will not function correctly, follow the instructions "To Turn Off Gas To Appliance" and call your service technician or gas supplier.

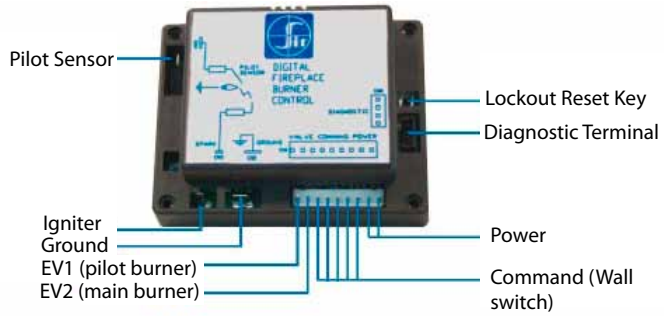

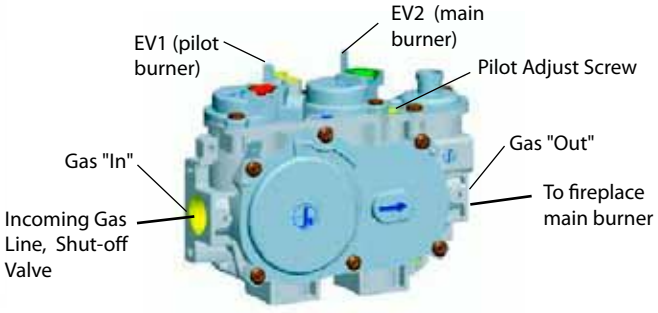

To Turn Off Gas To Appliance:

1. Turn off remote switch.
2. Remove the lower horizontal access panel.
3. Turn the incoming gas control valve to "Off".
4. Replace the lower horizontal access panel.

Operation

Lighting Instructions

See pages 12 to 13.

Burner Adjustment

The **DV 52 ST** is equipped with an adjustable burner, allowing you to raise or lower the flames. To adjust the flames, locate the black knob marked 'Hi-Lo', in the centre of the gas control valve (See ***Figure 32***). The front burners are not adjustable.

- To raise the flame height, turn the black knob (located behind the lower trim) **counter-clockwise**.
- To lower the flame height, turn **clockwise**.

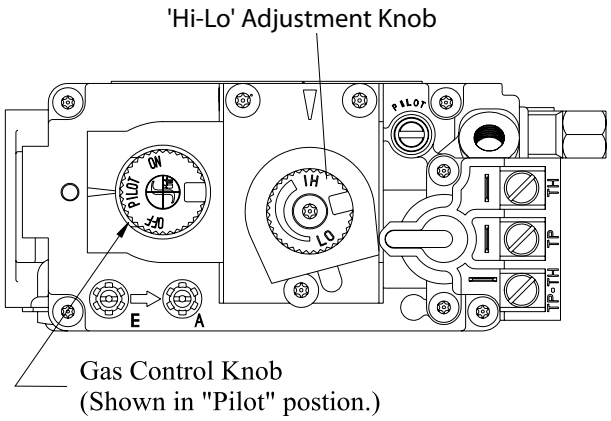

Figure 32. *'Hi-Lo' Adjustment on the **DV 52 ST** gas valve.*

⚠ CAUTION!

- Fireplace gas control must be in the "OFF" position and pilot and main burners extinguished when cleaning appliance with a vacuum.
- Doors can get very hot. Handle only when cool.

Maintenance

General

- **Have the fireplace and installation inspected yearly**. The inspection must include, but is not limited to, the following:
  - A visual check of the entire vent system and termination.
  - An inspection of the explosion relief flappers and the door gasketing to ensure a proper seal.
  - An inspection of the burner, venturi, and primary air openings.
  - An inspection of the gas valve, gas components, and pilot flame. For your convenience a ⅛" manifold pressure tap is supplied on the gas valve for a test gauge connection. See ***Figure 32***.
  - Inspection of all optional equipment, thermostats, etc.
- For **Natural Gas** this appliance requires a minimum inlet pressure of 5.5" W.C. and a manifold pressure of 3.5" W.C.
- For **Propane Gas** this appliance requires a minimum inlet pressure of 11" W.C. and a manifold pressure of 10" W.C.
- Always keep the fireplace area clear and free of combustible materials, as well as gasoline and other flammable vapors and liquids.
- Do not use this appliance if *any part has been under water*. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control which has been under water.

Cleaning

When the fireplace is first activated, there may be some smoking and a visible film may be left on the glass. This is a normal condition, and is the result of burning of protective coatings on new metal.

- Glass must be cleaned periodically to remove any film (which is a normal by-product of combustion) which may be visible. Film can easily be removed by removing the door, as shown on **page 12**. Handle the door carefully, and clean it with non-abrasive glass cleaners. One of the most effective products is Kel Kem.
- Silicone seals on inner door during initial firing will "off gas", leaving a visual deposit of a white substance on combustion chamber walls. This can easily be removed using normal household products.
- Use a vacuum cleaner or whisk broom to keep the control compartment, burner, and firebox free from dust and lint.
- Linear burners may be cleaned periodically with a vacuum to remove soot or other contaminates.

⚠ WARNING!

Do not attempt to clean glass when hot.

Do not clean glass with abrasive materials as any glass etching may cause premature glass failure.

Maintenance

Gas Control Valve

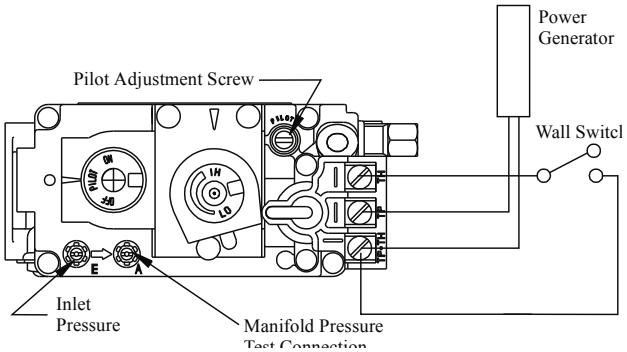

Figure 33. ***Sit Nova 820*** *gas valve*.

Pilot Burner Adjustment

1. Locate Pilot Adjustment Screw. ***See Figure 33.***
2. Adjust pilot screw to provide properly sized flame as shown in ***Figure 34***.
3. After installing or servicing, leak test with a soap solution with main burner on. Coat pipe and tubing joints, gasket etc. with soap solution. Bubbles indicate leaks. Tighten any areas where the bubbles appear until the bubbling stops completely.

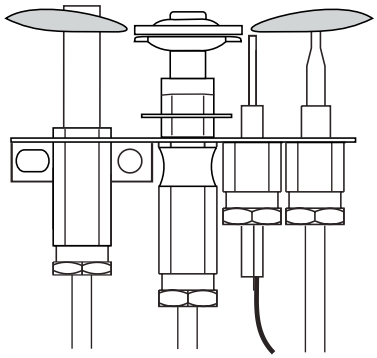

Figure 34. *Pilot Burner.*

Troubleshooting

DV 52 ST

The following is a troubleshooting chart of possible problems:

PROBLEM	CORRECTIVE ACTION
Noisy pilot flame	Locate pilot adjustment screw on gas control valve. Flame is decreased by turning adjustment screw clockwise.
Pilot won't ignite	Disconnect remote wires and try to light pilot. If pilot now works, remote connections are faulty. Check wiring diagram ***Figure 33.***
Main burner will not light	1. Check wiring, *see* ***Figure 33.*** 2. Check wall switch for proper connection.

If your fireplace still does not operate correctly, consult your dealer or the manufacturer.

All service and repairs should be performed by a qualified agency.

All spare parts, optional trim finishes are available from your local dealer or the manufacturer.

Maintenance

Troubleshooting

DV 52 ST E

To reset the SIT System, refer to schematic, below and:

1. Locate the connection to the battery backup and disconnect it.



2. Locate the AC/DC wall transformer and unplug the connector.

Wait for 120 seconds and re-connect the wall transformer and battery backup.

If your fireplace still does not operate correctly, consult your installer.

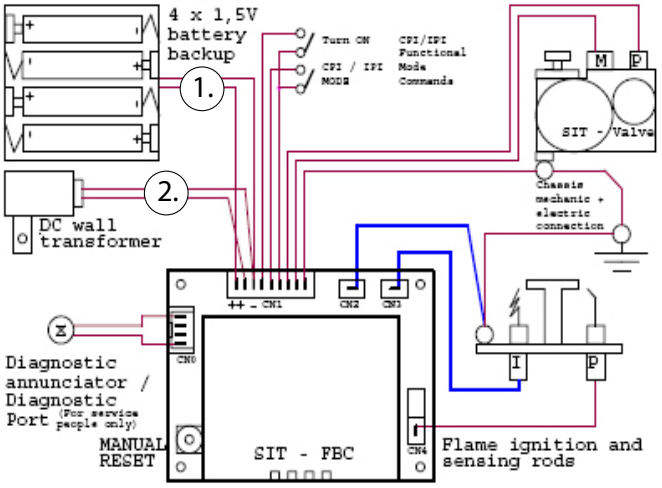

DV 52 ST Spare Parts

	DV 52 ST	DV 52 ST E
NG Gas Valve	RGC1006	RGC3033
LP Gas Valve	RGC1005	RGC3034
NG Pilot	RPA020	RPA052
LP Pilot	RPA021	RPA053
NG Burner	RBLS201	
LP Burner	RBLS202	
NG Orifice	Side: 2@51 DMS Center: 2@52 DMS	ROR
LP Orifice	4@62 DMS	
Door	RDTL52	RDTL52
Base	RLGS54	RLGS54

Warranty

The Warranty

The Company warrants the European Home Gas Appliance to be free from defects in materials and workmanship at the time of manufacture. On the European Home Gas Appliance, there is a ten-year warranty on the firebox and its components, a five-year warranty on the main burner and pilot burner, and a one-year warranty on the gas control valve and fibre logs. Glass, plated/painted finishes, and refractory lining are exempt.

Remedy And Exclusions

The coverage of this Warranty is limited to all components of the Gas Appliance manufactured by The Company.

This Warranty only covers European Home Gas Appliances installed in the United States or Canada.

If the components of the Gas Appliance covered by this Warranty are found to be defective within the time frame stated (see The Company's right of investigation outlined below). The Company will, at its option, replace or repair defective components of the Gas Appliance manufactured by The Company at no charge, and will also pay for reasonable labor costs incurred in replacing or repairing components. If repair or replacement is not commercially practical, The Company will, at its option, refund the purchase price of the European Home Gas Appliance.

This Warranty covers only parts and labor as provided above. In no case shall The Company be responsible for materials, components, or construction which are not manufactured or supplied by The Company, or for the labor necessary to install, repair or remove such materials, components or construction. All replacement or repair components will be shipped F.O.B. the nearest Company factory.

Qualifications To The Warranty

The Gas Appliance Warranty outlined above is further subject to the following qualifications:

(1) The Gas Appliance must be installed in accordance with The Company installation instructions and local building codes. The Warranty on this European Home Gas Appliance covers only the component parts manufactured by The Company. The use of components manufactured by others with this European Home Gas Appliance could create serious safety hazards, may result in the denial of certification by recognized national safety agencies, and could be in violation of local building codes. This warranty does not cover any damages occurring from the use of any components not manufactured or supplied by The Company

(2) The European Home Gas Appliance must be subjected to normal use. The Gas Appliances are designed to burn gas only. Burning conventional fireplace fuels such as wood, coal or any other solid fuel will cause damage to the Gas Appliance, will produce excessive temperatures and will result in a fire hazard.

Limitations On Liability

It is expressly agreed and understood that The Company sole obligation, and purchaser's exclusive remedy under this Warranty, under any other warranty, expressed or implied, or in contract, tort or otherwise, shall be limited to replacement, repair, or refund, as specified above.

In no event shall The Company be responsible for any incidental or consequential damages caused by defects in its products, whether such damage occurs or is discovered before or after replacement or repair, and whether or not such damage is caused by Company negligence. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. The duration of any implied warranty with respect to this European Home Gas Appliance is limited to the duration of the foregoing warranty. Some states do not allow limitation on how long an implied warranty lasts, so the above may not apply to you.

Investigation Of Claims Against Warranty

The Company reserves the right to investigate any and all claims against this Warranty and to decide upon method of settlement.

The Company Is Not Responsible For Work Done Without Written Consent

The Company shall in no event be responsible for any warranty work done without first obtaining The Company's written consent.

Dealers Have No Authority To Alter This Warranty

The Company employees and dealers have no authority to make any warranties nor to authorize any remedies in addition to or inconsistent with those stated above.

How To Register A Claim Against Warranty

In order for any claim under this Warranty to be valid, The Company must be notified of the claimed defect in writing or by telephone, as soon as reasonably possible after the defect is discovered. Claims against this Warranty in writing should include the date of installation, and a description of the defect.

Other Rights

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

NOTE: *The Company,* as stated above, refers to European Home, a division of Europa Ja, Inc.

The Company reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products.

Appendix A - Termination Locations

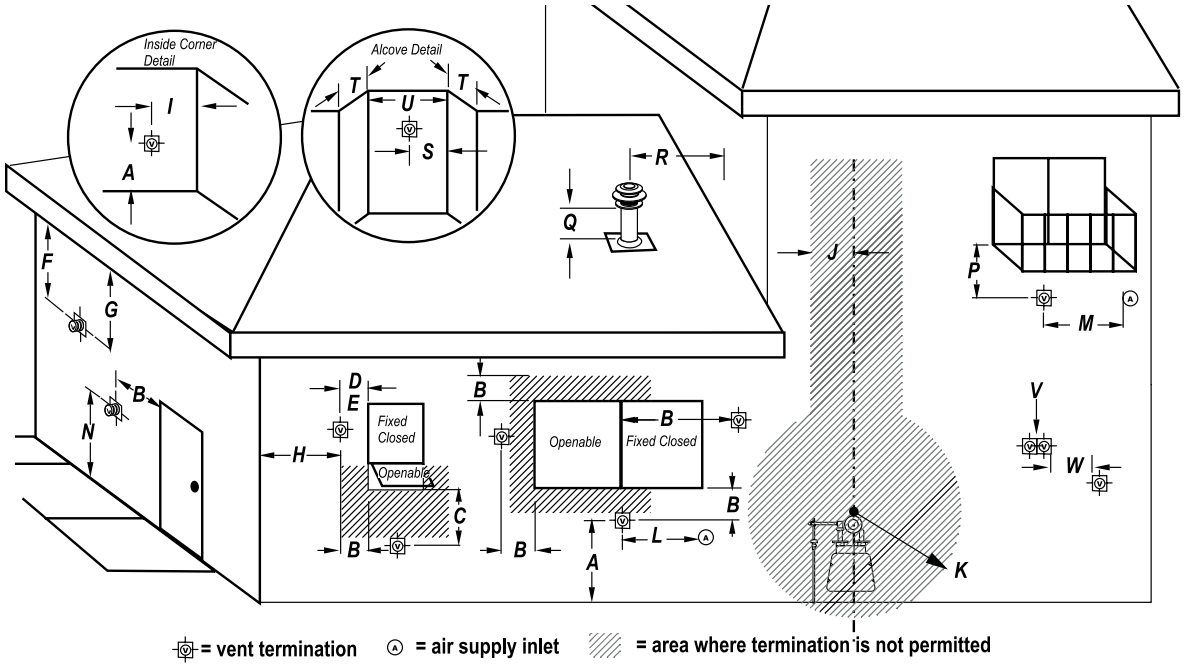

A = *clearance to the termination frame above grade, veranda, porch, deck, or balcony [16 inches (41 cm) minimum]*

B = *clearance to door, or sides and top of window, that may be opened [16 inches (41 cm) minimum for appliances ≤100 000 BTU/H (30kW)]*

C = *clearance to bottom of window that may be opened horizontally [36 inches (92 cm) minimum for appliances ≤100 000 BTU/H (30kW)]*

D = *no clearance to permanently closed window when installed with approved glass penetration termination*

E = *clearance to permanently closed window [16 inches 41 cm recommended to prevent condensation on window]*

F = *vertical clearance to ventilated soffit located above the termination within a horizontal distance of 2 feet (61 cm) from the centerline of the termination [22 inches (56 cm) minimum]*

G = *clearance to unventilated soffit [16 inches (41 cm) minimum to non-combustibles] [22 inches (56 cm) minimum to combustibles]*

H = *clearance to outside corner [9 inches (23 cm) minimum]*

I = *clearance to inside corner [12 inches (31 cm) minimum]*

J = ** not to be installed above a meter/regulator assembly within 40" (103 cm) horizontally from the centerline of the regulator*

K = *clearance to service regulator vent outlet [3 feet minimum in the United States] [*6 feet (1.8 m) minimum in Canada]*

L = *clearance to non-mechanical air supply inlet to building or the combustion air inlet to any other appliance [16 inches (41 cm) minimum for appliances ≤100 000 BTU/H (30kW)]*

M = *clearance to mechanical air supply inlet [*6 feet (1.8 m) minimum]*

N = † *clearance above paved sidewalk or a paved driveway located on public property [*7 feet (2.1 m) minimum]*

P = *clearance under veranda, porch, deck, or balcony [16 inches (41 cm) minimum‡ to non-combustibles][22 inches (56 cm) minimum‡ to combustibles]*

Q = *clearance above a roof [24 inches (61 cm) minimum]*

R = *clearance to adjacent walls and neighboring buildings [18 inches (46 cm) minimum]*

S = *clearance from corner in recessed location [12 inches (31 cm) minimum]*

T = *maximum depth in recessed location [48 inches (122 cm) minimum]*

U = *minimum width for back wall of recessed location [24 inches (61 cm) minimum]*

V = *no horizontal clearance between the frames of two terminations that are level.*

W = *horizontal clearance between the frames of two terminations that are not level. [36 inches (92 cm) minimum]*

† *a vent shall not terminate directly above a sidewalk or paved driveway which is located between two single family dwellings and serves both dwellings*

‡ *only permitted if veranda, porch, deck, or balcony has an open side that is equal to or greater than the depth of the enclosed area*

* *as specified in CGA B149 Installation Codes. Note: local codes or regulations may require different clearance.*

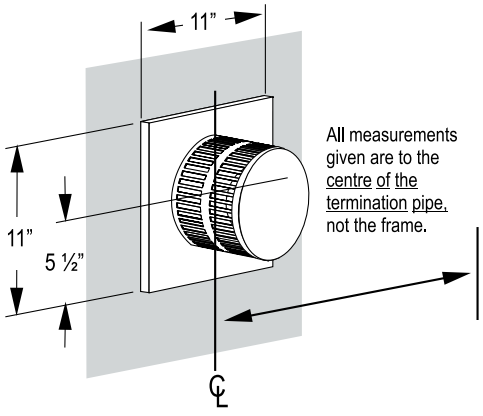

Appendix B - State of Massachusetts

Amendment

(Gas Fireplace / Equipment sold in the State of Massachusetts)
5.08: Modifications to NFPA-54, Chapter 10

(1) Revise NFPA-54 section 10.5.4.2 by adding a second exception as follows:
Existing chimneys shall be permitted to have their use continued when a gas conversion burner is installed, and shall be equipped with a manually reset device that will automatically shut off the gas to the burner in the event of a sustained back-draft.

(2) Revise 10.8.3 by adding the following additional requirements:
(a) For all side wall horizontally vented gas fueled equipment installed in every dwelling, building or structure used in whole or in part for residential purposes, including those owned or operated by the Commonwealth and where the side wall exhaust vent termination is less than seven (7) feet above finished grade in the area of the venting, including but not limited to decks and porches, the following requirements shall be satisfied:

1. INSTALLATION OF CARBON MONOXIDE DETECTORS. At the time of installation of the side wall horizontal vented gas fueled equipment, the installing plumber or gas fitter shall observe that a hard wired carbon monoxide detector with an alarm and battery back-up is installed on the floor level where the gas equipment is to be installed. In addition, the installing plumber or gas fitter shall observe that a battery operated or hard wired carbon monoxide detector with an alarm is installed on each additional level of the dwelling, building or structure served by the side wall horizontal vented gas fueled equipment. It shall be the responsibility of the property owner to secure the services of qualified licensed professionals for the installation of hard wired carbon monoxide detectors
a. In the event that the side wall horizontally vented gas fueled equipment is installed in a crawl space or an attic, the hard wired carbon monoxide detector with alarm and battery back-up may be installed on the next adjacent floor level.
b. In the event that the requirements of this subdivision can not be met at the time of completion of installation, the owner shall have a period of thirty (30) days to comply with the above requirements; provided, however, that during said thirty (30) day period, a battery operated carbon monoxide detector with an alarm shall be installed.

2. APPROVED CARBON MONOXIDE DETECTORS. Each carbon monoxide detector as required in accordance with the above provisions shall comply with NFPA 720 and be ANSI/UL 2034 listed and IAS certified.

3. SIGNAGE. A metal or plastic identification plate shall be permanently mounted to the exterior of the building at a minimum height of eight (8) feet above grade directly in line with the exhaust vent terminal for the horizontally vented gas fueled heating appliance or equipment. The sign shall read, in print size no less than one-half (1/2) inch in size, "GAS VENT DIRECTLY BELOW. KEEP CLEAR OF ALL OBSTRUCTIONS".

4. INSPECTION. The state or local gas inspector of the side wall horizontally vented gas fueled equipment shall not approve the installation unless, upon inspection, the inspector observes carbon monoxide detectors and signage installed in accordance with the provisions of 248 CMR 5.08(2)(a)1 through 4.
(b) EXEMPTIONS: The following equipment is exempt from 248 CMR 5.08(2)(a)1 through 4:

1. The equipment listed in Chapter 10 entitled "Equipment Not Required To Be Vented" in the most current edition of NFPA 54 as adopted by the Board; and
2. Product Approved side wall horizontally vented gas fueled equipment installed in a room or structure separate from the dwelling, building or structure used in whole or in part for residential purposes.

(c) MANUFACTURER REQUIREMENTS - GAS EQUIPMENT VENTING SYSTEM PROVIDED. When the manufacturer of Product Approved side wall horizontally vented gas equipment provides a venting system design or venting system components with the equipment, the instructions provided by the manufacturer for installation of the equipment and the venting system shall include:

1. Detailed instructions for the installation of the venting system design or the venting system components; and
2. A complete parts list for the venting system design or venting system.

(d) MANUFACTURER REQUIREMENTS - GAS EQUIPMENT VENTING SYSTEM NOT PROVIDED. When the manufacturer of a Product Approved side wall horizontally vented gas fueled equipment does not provide the parts for venting the flue gases, but identifies "special venting systems", the following requirements shall be satisfied by the manufacturer:

1. The referenced "special venting system" instructions shall be included with the appliance or equipment installation instructions; and

2. The "special venting systems" shall be Product Approved by the Board, and the instructions for that system shall include a parts list and detailed installation instructions.
(e) A copy of all installation instructions for all Product Approved side wall horizontally vented gas fueled equipment, all venting instructions, all parts lists for venting instructions, and/or all venting design instructions shall remain with the appliance or equipment at the completion of the installation.

(3) After NFPA-54 section 10.10.4.2 add a new section 10.10.4.3 as follows:
When more than four gas appliances are to be vented through a common gas vent or common horizontal vent manifold, a plan of the proposed vent installation shall be submitted to the Inspector and the serving gas supplier for review and approval.

Extraction from: Massachusetts Rules and Regulations
5.00: Amendments To 2002 Edition Of ANSI Z223.1-NFPA-54

EUROPEAN HOME
a division of Europa Ja, Inc.

376 Washington St.
Suite 203
Malden, MA 02148

tel: 781/324-8383
fax: 781/324-8384
www.europeanhome.com